
Chimney Reinforcement Recommendations

for E-Classic 1400, E-Classic 1450, E-Classic 2400 and E-Classic 3200

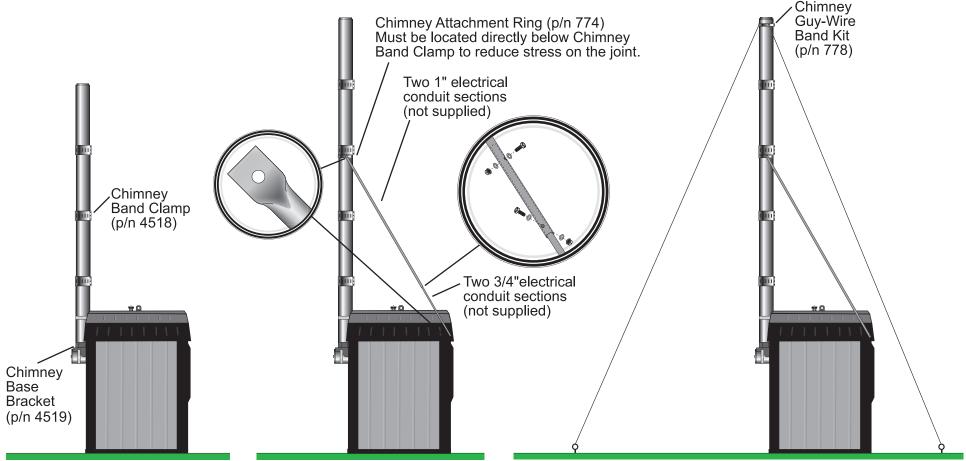

Three or Four Sections

When three or four sections of chimney are being used, remove standard locking band clamps and replace with Chimney Band Clamp Kit (p/n 4518) for each joint. A Chimney Base Bracket Kit (p/n 4519) is also recommended.

Five or More Sections

When five or more sections of chimney are being used, a Chimney Band Clamp Kit for each joint, a Chimney Base Bracket Kit and a Chimney Attachment Ring (p/n 774) are recommended.

Fall Zone

If objects are placed in the fall zone of the chimney, a Chimney Guy-Wire Band Kit (p/n 778) or additional bracing is recommended.

NOTE

- Additional bracing may be necessary in certain areas such as those subject to severe weather, winds, freezing rain, etc.
- Inspect all bracing bi-annually for integrity.



September 2011 © 2011 Central Boiler